
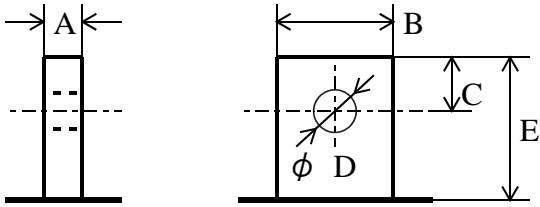


EAGLE PICHER 製 【小型制御弁式鉛蓄電池】仕様概要

2004.01.10 株式会社ニスコ

バッテリー型式	CF12V65DC (日本規格)														
公称電圧	DC12V														
容量 (25 °C)	20 時間率	10 時間率	5 時間率	1 時間率											
	65 Ah	60.7 Ah	53.5 Ah	42.9 Ah											
外形寸法	長さ	巾	箱高さ	総高さ											
	350 mm	167 mm	179 mm	183 mm											
重量	22.2 Kg														
自己放電率 (20 °C)	3% / 月														
温度対容量 (20 時間率)	40 °C	25 °C	0 °C	-15 °C											
	102%	100%	85%	65%											
充電電圧 (20 °C)	サイクル仕様		フロート又はトリクル仕様												
	14.5V ~ 14.9V (-30mV/°C)		13.6V ~ 13.8V (-20mV/°C)												
	推奨充電率 110% 最大電流 21 A														
端子位置と形状 M6 ボルト / ナット付属 推奨締付けトルク 300 ~ 400N・cm	 <p>上面</p> <p>端子位置</p>				<p>端子部寸法</p> <table border="1"> <tr> <td>A</td> <td>3 mm</td> </tr> <tr> <td>B</td> <td>20 mm</td> </tr> <tr> <td>C</td> <td>7.5 mm</td> </tr> <tr> <td>D</td> <td>8 mm</td> </tr> <tr> <td>E</td> <td>18 mm</td> </tr> </table>	A	3 mm	B	20 mm	C	7.5 mm	D	8 mm	E	18 mm
	A	3 mm													
B	20 mm														
C	7.5 mm														
D	8 mm														
E	18 mm														