



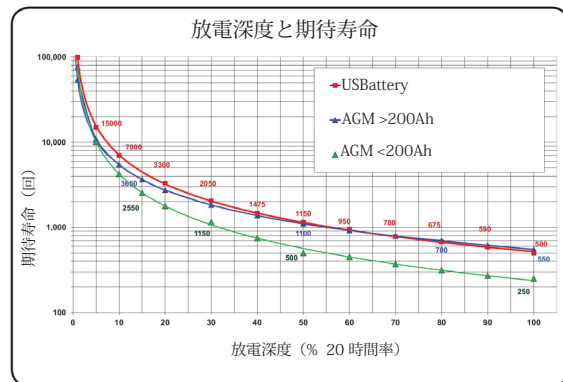

【6V 開放型バッテリー】


型式	容量			重量 Kg	寸法			通常在庫
	20時間率	5時間率	25A 放電		長さ	幅	総高さ	
	Ah	Ah	分		mm (() はハンドルあり)			
US2200 XC2	232	181	474	28	260	181	286	◎
US125 XC2	242	198	517	30	260	181	286	◎
US145 XC2	251	213	562	32	260	181	302	◎
US250 XC2	255	217	570	34	295	181	295	
US250HC XC2	280	239	635	35	295	181	295	
US305 XC2	310	261	715	41	302	181	371	◎
US305HC XC2	340	283	790	43	302	181	371	◎
USL16 XC2	385	297	865	50	302	181	425	
USL16HC XC2	420	323	965	54	302	181	425	◎
US100DIN XC2	247	199	520	28	244	191	276	◎

【性能例 (US2200 XC2)】

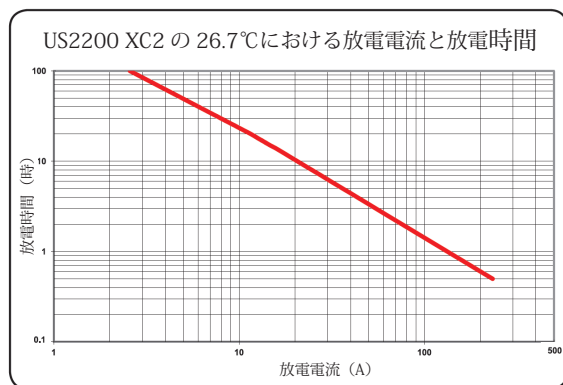

【8V 開放型バッテリー】

US8VGC XC2	170	133	325	28	260	181	286	◎
US8VGHXC XC2	183	147	365	30	260	181	286	◎

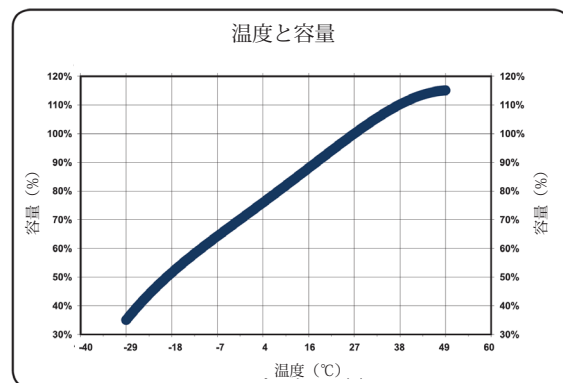

【12V 開放型バッテリー】

US185 XC2	200	158	398	49.4	397	179	378	◎
US185HC XC2	220	172	443	54.4	397	179	378	◎
US31DC XC2	130	99	225	29.7	330	171	243	◎
US27DC XC2	105	89	205	26.6	324	171	248	◎
US24DC XC2	85	68	145	23	276	171	238	
US12VRX XC2	155	122	292	39	333(355)	179	289	◎
US12VE XC2	145	115	270	36.7	333(355)	179	289	◎

【液栓形状】



スピードキャップ シングルキャップ


【端子形状】



UT



UTL



LARGE "L"



SMALL "L"



SAE



DUAL



OFFSET "S"

お問い合わせ先