
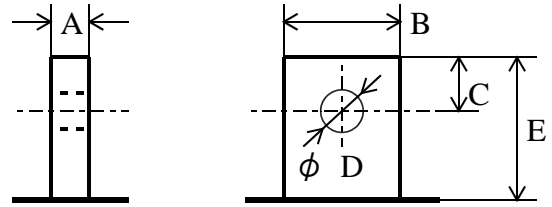


EAGLE PICHER 製 【小型制御弁式鉛蓄電池】仕様概要

2004.01.10 株式会社ニスコ

| | | | | | | | | | | | | | | | |
|--|---|---------|---|---------|--|---|------|---|-------|---|------|---|------|---|-------|
| バッテリー型式 | CF12V38DC | | | | | | | | | | | | | | |
| 公称電圧 | DC12V | | | | | | | | | | | | | | |
| 容量 (25 °C) | 20 時間率 | 10 時間率 | 5 時間率 | 1 時間率 | | | | | | | | | | | |
| | 40 Ah | 38.2 Ah | 32.7 Ah | 23.7 Ah | | | | | | | | | | | |
| 外形寸法 | 長さ | 巾 | 箱高さ | 総高さ | | | | | | | | | | | |
| | 197 mm | 165 mm | 170 mm | 170 mm | | | | | | | | | | | |
| 重量 | 13.5 Kg | | | | | | | | | | | | | | |
| 自己放電率 (20 °C) | 3% / 月 | | | | | | | | | | | | | | |
| 温度対容量 (20 時間率) | 40 °C | 25 °C | 0 °C | -15 °C | | | | | | | | | | | |
| | 102% | 100% | 85% | 65% | | | | | | | | | | | |
| 充電電圧 (20 °C) | サイクル仕様 | | フロート又はトリクル仕様 | | | | | | | | | | | | |
| | 14.5V ~ 14.9V (-30mV/°C) | | 13.6V ~ 13.8V (-20mV/°C) | | | | | | | | | | | | |
| | 推奨充電率 110% 最大電流 12 A | | | | | | | | | | | | | | |
| 端子位置と形状 M5 ボルト / ナット付属 推奨締付けトルク 200 ~ 250N・cm |  <p>上面</p> <p>端子位置</p> | |  | | <p>端子部寸法</p> <table border="1"> <tr> <td>A</td> <td>2 mm</td> </tr> <tr> <td>B</td> <td>14 mm</td> </tr> <tr> <td>C</td> <td>5 mm</td> </tr> <tr> <td>D</td> <td>6 mm</td> </tr> <tr> <td>E</td> <td>15 mm</td> </tr> </table> | A | 2 mm | B | 14 mm | C | 5 mm | D | 6 mm | E | 15 mm |
| | A | 2 mm | | | | | | | | | | | | | |
| B | 14 mm | | | | | | | | | | | | | | |
| C | 5 mm | | | | | | | | | | | | | | |
| D | 6 mm | | | | | | | | | | | | | | |
| E | 15 mm | | | | | | | | | | | | | | |